


versatile™ 4C Mailbox, 10 High Suite

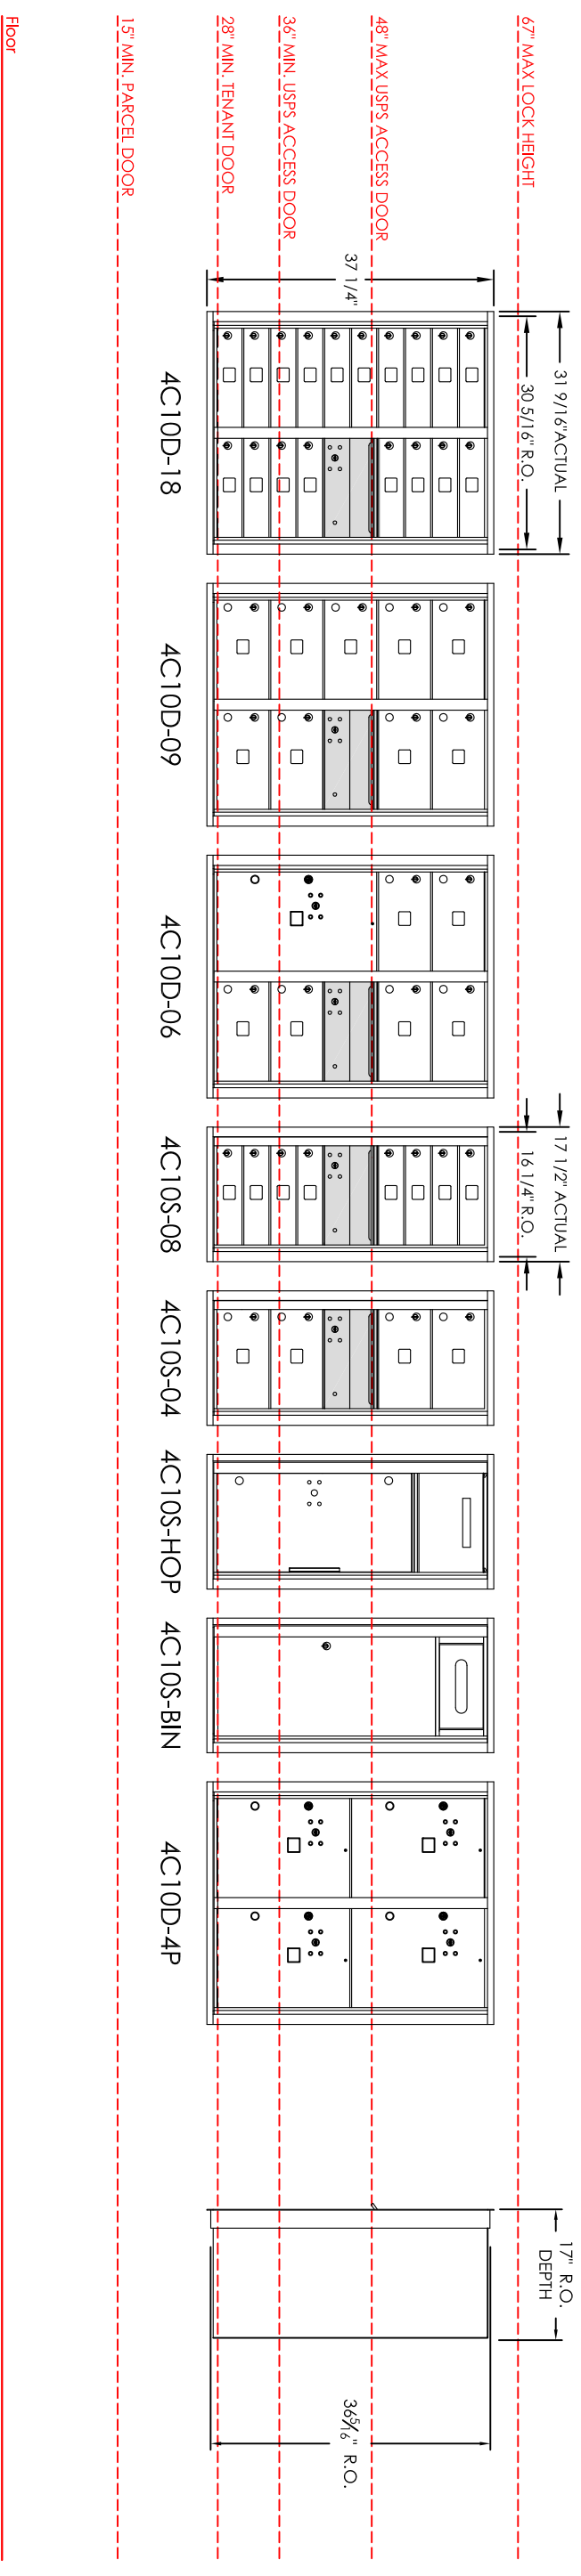

- NOTES:
- Below are the USPS STD-4C installation guidelines:
 - At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
 - No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - No patron (tenant) lock shall be positioned more than 67" AFF.
 - No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - The USPS Arrow lock shall be positioned 36" - 48" AFF.

PRODUCT SERIES: versatile™ 4C Mailbox 10 High Suite

AF FIORENCE
manufacturing company
 5935 Corporate Drive • Manhattan, KS 66503
 www.florencemailboxes.com • (800) 275-1747
 A GIBRALTAR INDUSTRIES COMPANY

MODEL	4C10H	REV	A
SCALE	NONE	LAST REV DATE	5/13/2014
DRAWING NUMBER	4C10HCS	DRAWN BY	AFD
		SHEET	1 OF 1